

# DEALSEAL<sup>®</sup>-N300

**NEUTRAL CURE, MILDEW RESISTANT  
100 % SILICONE SEALANT - PROFESSIONAL GRADE.**

DEAL International Inc. • P.O. Box 10088 • Rochester, NY 14610 • 585-288-4444 • Fax: 585-288-4578

## PRODUCT DESCRIPTION

**DEALSEAL<sup>®</sup>-N300** is an odorless, high speed curing, 100% silicone that remains permanently elastic after cure. . It has been engineered with special features to **PROFESSIONAL, HIGH-VOLUME** installers for indoor and outdoor installation applications.

## USES

- **Windows & Door Installation** - Interior & Exterior.
- **HVAC** - Joints in ventilation & air-conditioning ductworks.
- **Plumbing** - Bathtubs, Enclosures & plumbing joints.
- **Gutter** install & repair.
- **Kitchen & Bath counter top & cabinet** installation.
- **Siding** installation & repair.
- Excellent adhesion to: PVC, vinyl, concrete, brick, mortar, aluminum, wood, marble, granite, tile, ceramics, iron, kynar of pvc coated metals (Coil for capping), melamine and lots more...

## HIGH VOLUME BENEFITS

- **NO SERVICE CALL!** - Adheres to most construction substrates including vinyl (PVC) to give a complete water and air tight seal.
- **NO SMELL!** - Better homeowner experience.
- **NO DRIPPING!** - No messy carpets, jeans or sills.
- **NO POPPING!** - Perfect bead and not messy walls.
- **FAST SKING & CURE TIME** - Will not allow your work to be damaged once you leave.
- **NO SHRINKAGE** - What you apply is what you get!
- **NO BLACKING OVER TIME** - Mildew / Fungus resistant. Just wipe with wet cloth to clean.
- **GET PERFECT BEAD** - Thick paste, no air pockets and removable nozzle assure consistent bead.
- **YOUR INSTALLERS WILL LOVE YOU FOR GETTING DEALSEAL<sup>®</sup>-N300**



## FOR ORDERING:

DEAL International Inc. • P.O. Box 10088; Rochester, NY 14610 • WWW.DIIHQ.COM  
Tel: (585) 288-4444 • Order Fax: (585) 444-1456 • Email: orders@diisoft.com

## TECHNICAL CHARACTERISTICS

Shore A Hardness	18
Tensile strength	125 psi
Movement Capability	+/- 25%
Skinning Time	7-12 min (77°F @ 50% RH)
Tack free time	5-10 min (77°F @ 50% RH)
Cure Time	24 hours (77°F @ 50% RH)
Full cure	2-4 days (77°F @ 50% RH)
Specific Gravity	0.99 g/cm <sup>3</sup>
Application Temp.	40° F to 104° F
Service Temperature	-40° F to +305° F
Modulus, 100% elongation	0.40 MPa
Elongation at break	450%
Elastic recovery	> 95%
Life expectancy	30+ years
Corrosion-nonferrous metal	None


## PACKAGING & STORAGE

**DEALSEAL<sup>®</sup>-N300** is supplied in 300 ml (10.1 fl. oz) cartridges with removable nozzles, 24 cartridges per case & 56 cases per skid (1,344 cartridges/pallet).

It has a shelf life of 12 months stored in a dry place at or below +25°C in its original container.

## DIRECTION FOR USE

- Surfaces should be clean and dry, free of dust or grease.
- Apply sealant firmly into joint or corner to provide a solid fill.
- Tool down using spatula or stick dipped in soapy water.
- Wait 24 hours before exposure to water.
- Do not use in area confined from atmospheric moisture, that may bleed oils or solvents, or area where painting is required.

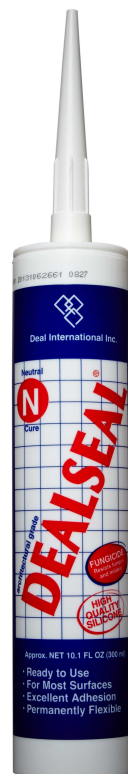

**NOTICE TO PURCHASER:** DEAL International Inc. warrants its products to conform to their published specifications. The user shall determine the suitability of the product to their particular application. THE FOREGOING WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, INCLUDING THOSE OF THE MERCHANTABILITY OR FITNESS FOR ANY PURPOSE NOT EXPRESSLY SET FORTH HEREIN. Manufacturer's and seller's liability for damage hereunder shall not exceed the purchase value of the goods used. IN NO EVENT SHALL MANUFACTURER OR SELLER BE RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF THIS PRODUCT BY BUYER, BUYER'S USER, OR ANY OTHER PERSON. Notification of claim must be sent in writing to DEAL International Inc.